


SPECIAL INSTRUCTIONS FOR OPTIONAL 120-240 VOLT POWER TRANSFORMERS

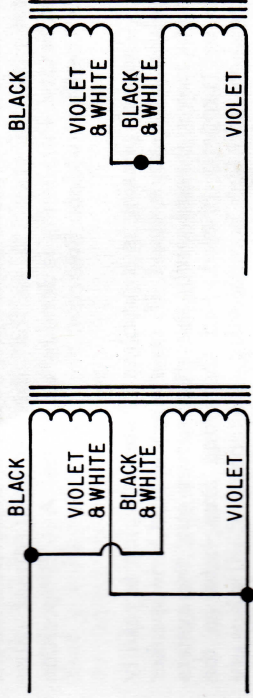

Dynakit preamplifiers supplied with power transformer PA-522 can be wired for use with either 120 or 240 volt, 50 or 60 cycle AC power sources, as follows:

For 120 volt operation

- 1 () Twist together the black and black-white leads, and connect both to lug A of outlet #4 (S).
- 2 () Twist together the violet and violet-white leads, and connect both to lug B of outlet #4 (S).

For 240 volt operation

- 1 (✓) Connect the black lead to lug A of outlet #4 (S).
- 2 (✓) Connect the violet lead to lug B of outlet #4 (S).
- 3 (✓) Twist together above the chassis the violet-white and the black-white leads, and solder them together. Insulate this connection with electrical insulating tape.