



5881

A. F. BEAM PENTODE



Base: OCTAL

$$U_f = 6,3 \text{ V}$$
$$I_f = 0,9 \text{ A}$$

Typical Characteristics: Class A1:

Single tube Push-Pull

U_a	= 250	270	V
U_{g2}	= 250	270	V
U_{g1}	= -14	-17,5	V
I_a	= 63	134	mA
I_{g2}	= 4,3	11	mA
R_a	= 2,5	-	k Ω
R_{a-a}	= -	5	k Ω
N	= 6,7	17,5	W

Limiting Values:

	Triode	Pentode	
U_a	= 450	500	V
U_{g2}	= 450	450	V
W_a	= 26	23	W

Grid No 1 Circuit Resistance

Fixed Bias	0,1	M Ω
Self Bias	0,5	M Ω



TRANSFER CHARACTERISTICS

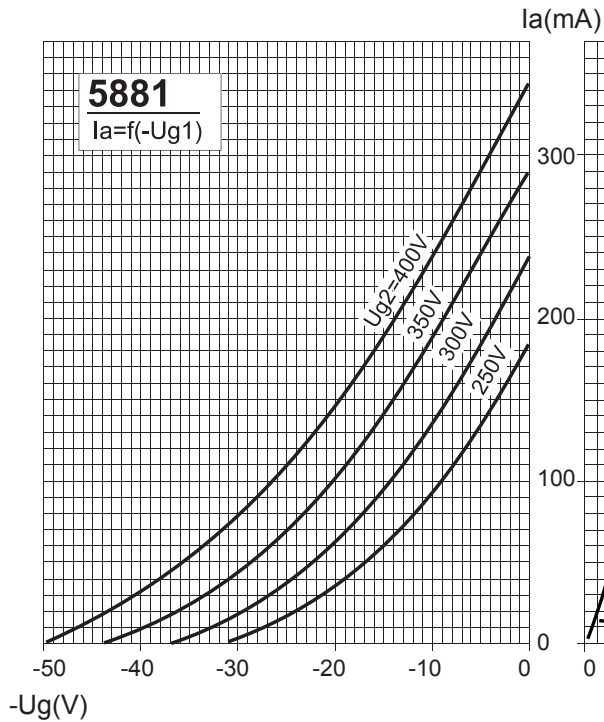


PLATE CHARACTERISTICS

